



Gauge Modular Block

50 to 100 ℓ /min
25MPa

Features


- ① This modular block makes it possible to attach a pressure gauge to the P and T ports or the A and B ports.
- ② Connection to the ports is extremely simple.

Specifications

Model No.	Nominal Diameter (Size)	Maximum Working Pressure MPa{kgf/cm ² }	Maximum Flow Rate ℓ /min	Weight kg	Gasket Surface Dimensions
OK-G01-P-20 OK-G01-T-20	1/8	25{255}	50	0.6	ISO 4401-03-02-0-94
OK-G01-W-20				0.6	
OK-G01-P-H-20 OK-G01-T-H-20				1.0	
OK-G01-W-H-20				1.0	
OK-G03-J50	3/8	25{255}	100	2.3	ISO 4401-05-04-0-94

Understanding Model Numbers

OK - G 01 - P - (H) - 20


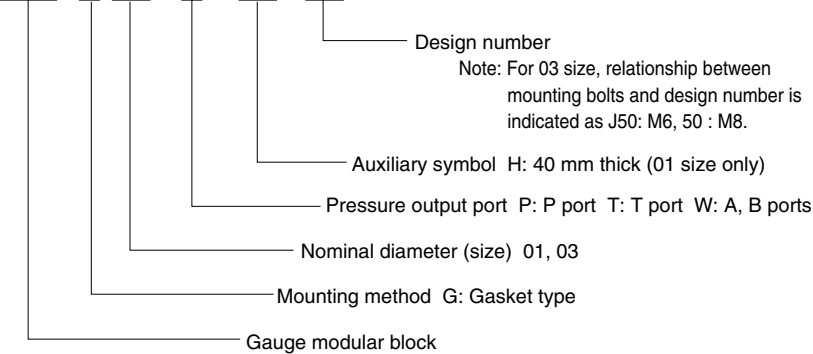


● Handling


- ① When installing the OK-G01-P- (H)-20, OK-G01-T-(H)-20, or OK-G01-W-(H)-20, make sure the model number printing is oriented so it can be read correctly from the P port side.
- ② Note that a sub plate and installation bolts are not included. See pages D-90 through D-95 if these items are required.

Installation Dimension Drawings



OK-G01-P-20

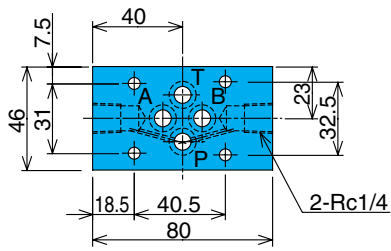



OK-G01-T-20

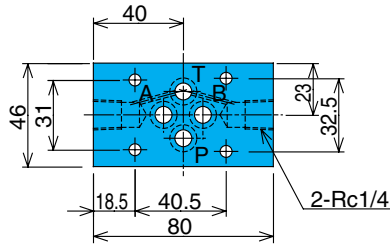



OK-G01-W-20

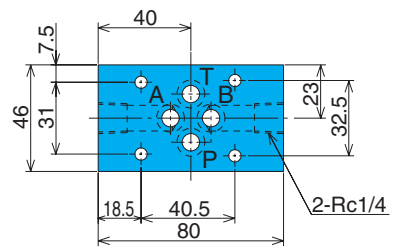



OK-G01-P-H-20

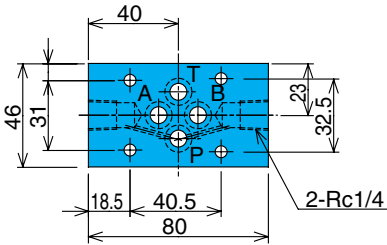


OK-G01-T-H-20

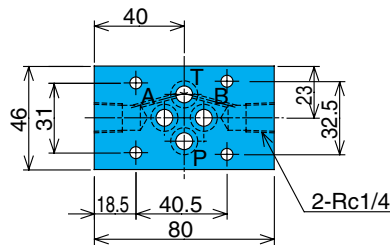

OK-G01-W-H-20

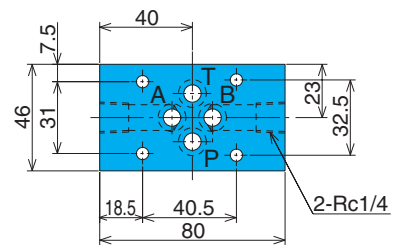

OK-G03-J50

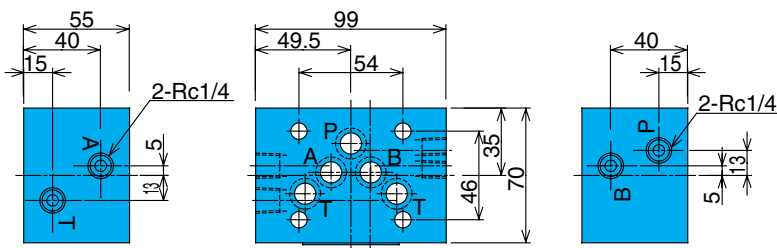

Seal Part List

Size	Part Name	Part Number	Q'ty
01	O-ring	1B-P29	4
03	O-ring	AS568-014(Hs90)	5

Note) O-ring 1A/B-** refers to JIS B2401-1A/B.