

Features

①Connecting a relief valve or reducing valve to the vent port of a balanced piston type pressure control valve provides simple remote control of pressure.


②RCD type can also be used as a direct type relief valve.

Specifications

Model No.		Nominal Diameter	Maximum Working Pressure	Maximum Flow Rate	Pressure adjustment range	Weight
Screw Mounting	Gasket mounting	(Size)	MPa{kgf/cm²}	ℓ /min	MPa{0kgf/cm²}	kg
RCD-T02-1-11 3-11	-	- 1/4	1/4 21{214} P, V ports 2	15	0.8 to 7{ 8.2 to 71.4} 3.5 to 21{35.7 to 214 }	2.1
RC-T02-1-12 3-12	RC-G02-1-21 3-21			2	0.8 to 7{ 8.2 to 71.4} 3.5 to 21{35.7 to 214 }	1.4


Note) The pressure adjustment range indicates cracking pressure.

Understanding Model Numbers

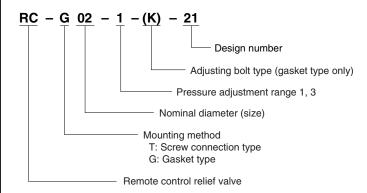

Installation Dimension Drawings

RCD-T02-*-11 (Screw Mounting)

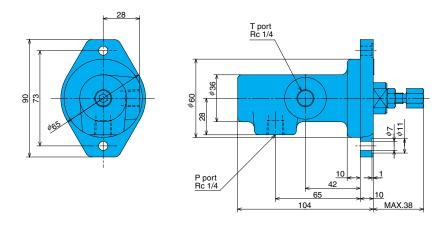

Handling

- 1 To adjust pressure, loosen the lock nut and then rotate the handle clockwise (rightward) to increase pressure or counterclockwise (leftward) to decrease it.
- 2Make sure that drain port back pressure is no greater than 0.2MPa {2.0kgf/cm²}.
- 3When configuring pipes for the pressure control valve and remote control valve, use of thick iron pipe with an inside diameter of no more than 4mm and a connection length of no more than three meters is recommended. Pipe capacity can be a source of vibration.
- 4When an adjustment bolt type is required for the pressure adjustment block, insert K for the type specification. See the dimension drawings, RC-G02 only.
- 5 Use the following to specify a sub plate.


Model No.	Weight kg
MRC-02-20	1.0

6The following are the bundled mounting bolts.


Model No.	Bolt Dimensions	Q'ty	Tightening Torque N·m{kgf·cm}
RC-G02-*-21	M8 × 25 ℓ	4	20 to 25
110 002 21			{205 to 255}

Note) For mounting bolts, use 12T or equivalent.


RC-T02-*-12 (Screw Mounting)

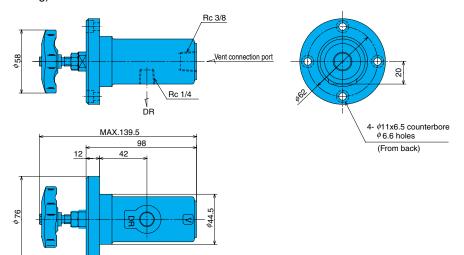

RC-G02-*-21 (Gasket Mounting)




Sub Plate MRC-02-20



Cross-sectional Drawing

RCD-T02-*-11



Part No.	Part Name
1	Body
2	Sleeve
3	Sleeve
4	Poppet
5	Retainer
6	Spring
7	Guide
8	Nut
9	Screw
10	Plug
11	O-ring


	Part No.	Part Name
•	12	O-ring
	13	O-ring
	14	O-ring
	15	Nameplate

Seal Part List (Kit Model Number RCS-T02CD)

Part No.	Part Name	Part Number	Q'ty
11	O-ring	S12.5(NOK)	1
12	O-ring	1A-P11	1
13	O-ring	1B-P14	1
14	O-ring	1B-P18	1

Note) O-ring 1A/B-** refers to JIS B2401 1A/B.

RC-G02-*-(K)-21



Seal Part List (Kit Model Number RCBS-G02)

Part No.	Part Name	Part Number	Q'ty
10	O-ring	1B-G30	1
11	O-ring	1B-P6	1
12	O-ring	1A-P11	1

Note) O-ring 1A/B-** refers to JIS B2401 1A/B.

	Part No.	Part Name
	1	Poppet
2		Seat
3		Plunger
	4	Retainer
	5	Spring
	6	Handle
	7	Nut
	8	Cover
	9	Collar
	10	O-ring
	11	O-ring
	12	O-ring
	13	Plug
	14	Plate
		•